Clutch tips

- Use Hinson fiber clutch plates, OEM steel plates & Hinson clutch spring in your clutch for the best performance.
- Soak your clutch plates before you install them.
- Using a mineal based oil (like Maxima Premium 10-40) will maximize clutch reliability & performance.
- Change the oil after each time you ride.

Also available for this model

- C134-2601 Clutch cover
- FP373-8-002 Fiber Clutch Plate Kit
- CS373-0116 High Performance Clutch Spring.
- H134-PP-2601 Pressure Plate, **ONLY AS REPLACEMENT TO HINSON PRESSURE PLATE**
- H134-IH-2601 Inner Hub, **ONLY AS REPLACEMENT PART TO HINSON INNER HUB ASSEMBLY**

Warranty information

All merchandise manufactured by Hinson Clutch Components is guaranteed against defects in material and workmanship for a period of six months from the original date of purchase. Use of Kevlar and carbon fiber clutch plates will cause excessive wear and will void your warranty. Hinson Clutch Components will not warranty any product that has been modified, or where the product became defective due to improper installation, improper use, or any other misuse of the product. Hinson Clutch Components shall not be liable for any other damages caused by any defects in the product, whether incidental, consequential or otherwise. If your product is defective we will, at our discretion, repair or replace the product after it is returned to Hinson Clutch Components for a warranty inspection. Any request for warranty assistance will require your original receipt or acceptable proof of purchase. Hinson Clutch Components liability is limited to the cost of repair or replacement of the product. All warranty items will be viewed and acted upon at the discretion of Hinson Clutch Components

Important! Warranty registration

Products must be registered in order to be eligible for warranty. Please log onto www.hinsonracing.com to activate your warranty registration. You will need to make note of your serial number, the small 8 digit number 180 degrees from Hinson Clutch Components on your part, as you cannot register your product without it.

THANK-YOU FOR BUYING A HINSON CLUTCH COMPONENT

HINSON CLUTCH COMPONENTS Racing

Billetproof Inner Hub / Pressure Plate Kit

Ducati Desmo450 MX

Thank you for purchasing Hinson Clutch Components. Please enjoy the high level of factory performance we have included in this package. Looking through these instructions will ensure your machine is on the way to its highest level of performance.

H134-IP-2601



1630 W. 11th St. Unit E, Upland, CA 91786
p 909.946.2942 | f 909.985.2301 | www.hinsonracing.com

1.Remove inner hub/pressure plate

- Remove the pressure plate and inner hub assembly making sure to save the spring seat on the pressure plate.
- Note the standard location of bolts on spring ring
- Remove 6 sleeve from outside of stock inner hub and place on Hinson inner hub (figure1)
- Remove inner hub center from stock inner hub to retrieve 6 cushions and place in Hinson inner hub in same location. (figure2)&(figure3)
- **Make sure to keep the fibers and steels in the same order that they come out.**

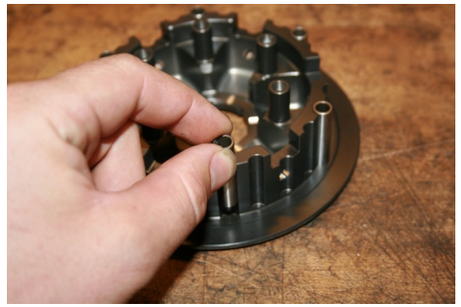


figure 1

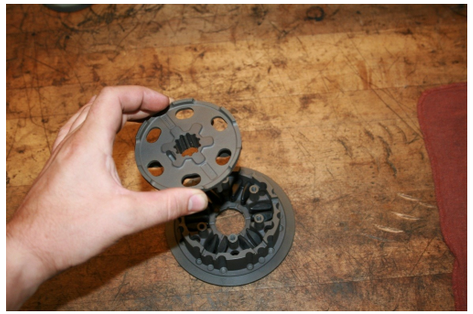


Figure 2

2. Installing Hinson inner hub and pressure plate

- Install Hinson inner hub center into the Hinson inner hub outer.
- Note to make sure inner hub center is fully seated. (figure4)
- Install inner hub, **Torque mainshaft nut to manufacture's specification** then bend over lock tab.
- Place (2) sleeves into inner hub at 11 & 1 o'clock for location of steel plates.
- Install steel & fiber clutch plates, starting with a steel and alternating with a fiber & steel until all plates are installed. **(Ensure the plates are reinstalled in the same order they came out).**
- Install remainder of sleeves.
- Install pressure plate, spring seat with spring and retainer and tighten bolts to manufacture's torque specification.

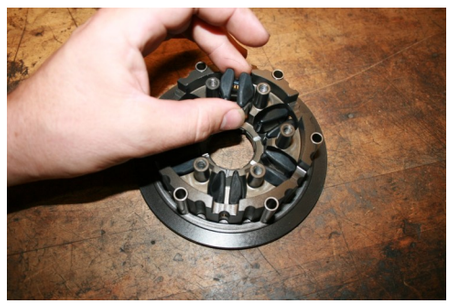


Figure 3

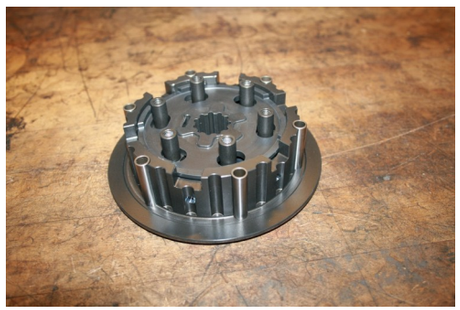


Figure 4